








ROTALLARM S
ROTALLARM S H1



> 3 LUMINOUS SOURCES <
> EXCELLENT OPTICAL PERFORMANCE <



ALSO AVAILABLE



ROTALLARM S
STEADY/FLASHING
ROTALLARM S
FLASHING H1
ROTALLARM S X

ROTALLARM S

The most successful rotating beacon in Sirena's history, engineered for industrial applications.

Available with 3 luminous sources ROTALLARM S offers versatility as well as a complete range of products.

KEY CHARACTERISTICS

LIGHT EFFECTS

ROTALLARM S and **ROTALLARM S H1**: ROTATING LIGHT

ROTALLARM S STEADY/FLASHING: STEADY/FLASHING LIGHT

ROTALLARM S FLASHING H1: FLASHING LIGHT

ROTALLARM S X: XENON FLASHING LIGHT

VOLTAGES

ROTALLARM S: 12V ACDC, 24V ACDC, 48V DC, 48V AC, 110V AC and 240V AC +/-10% (supplied with bulb)

ROTALLARM S H1: 12V ACDC, 24V ACDC +/-10% (supplied with bulb)

ROTALLARM S STEADY/FLASHING: 12/48V DC, 24/240V AC +/-10% (supplied without bulb)

ROTALLARM S FLASHING H1: 12V ACDC, 24V ACDC +/-10% (supplied with bulb)

ROTALLARM S X: 12/24V ACDC, 110V AC and 240V AC +/-10% (supplied with bulb)

PROTECTION GRADE

IP65

OPERATING TEMPERATURE

-30/+50 °C | X: -30/+40 °C

MECHANICAL FEATURES

Self-extinguishing high impact resistance PC dome

Self-extinguishing PC/ABS base with M20 cable gland

Screw mounting, screws not included

Parallel axis gear drive (rotating version ROTALLARM S and ROTALLARM S H1)

OPTICAL FEATURES

ROTALLARM S: anodized aluminium reflector with BA 15s 45W bulb (for 12V ACDC, 24V ACDC, 48V DC versions) or E14 25W bulb (for 48V AC, 110V AC and 240V AC versions)

ROTALLARM S H1: anodized aluminium reflector with H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM S STEADY/FLASHING: 40W Incandescent lamp with Ba 15d socket

ROTALLARM S FLASHING H1: H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM S X: Xenon discharge tube 6J, allows a high intensity single flash (1F)

CERTIFICATIONS



ACCESSORIES



P BASE


Base for pole mounted installations (Ø 48,5) with 2 retaining dowels
Recommended for use with black base product

GRID for P BASE




WALL BASE


DRAWINGS, DIMENSIONS AND WEIGHTS



ROTALLARM S



ROTALLARM S
+ GRID + P BASE



ROTALLARM S
+ P BASE



ROTALLARM S* - Rotating beacon with incandescent bulb

	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
12V ACDC	63001	82002	63002	82001	63003	82004	63004	82005	63005	82095	63006	82003
24V ACDC	63013	82012	63014	82011	63015	82014	63016	82015	63017	82097	63018	82013
48V DC	63025	82083	63026	82080	63027	82081	63028	82074	63029	82082	63030	82084
48V AC	63031	82078	63032	82076	63033	82075	63034	82046	63035	82077	63036	82034
110V AC	63037	82027	63038	82026	63039	82029	63040	82030	63041	82098	63042	82028
240V AC	63049	82042	63050	82041	63051	82044	63052	82045	63053	82035	63054	82043

*Supplied with bulb

ROTALLARM S H1* - Rotating beacon with halogen bulb

	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
12V ACDC	63055	82051	63056	82050	63057	82053	63058	82054	63059	82092	63060	82056
24V ACDC	63066	82061	63067	82060	63068	82063	63069	82064	63070	82093	63071	82062

*Supplied with bulb

ROTALLARM S STEADY/FLASHING* - Steady/flashing light with incandescent bulb

	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
12/48V DC	89451	89471	89452	89472	89453	89473	89454	89474	89455	89475	89456	89476
24/240V AC	89461	89481	89462	89482	89463	89483	89464	89484	89465	89485	89466	89486

*Supplied with bulb

ROTALLARM S FLASHING H1* - Flashing light with halogen bulb

	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
12V ACDC	82401	80051	82402	80050	82403	80053	82404	80054	82405	80094	82406	80052
24V ACDC	82421	80061	82422	80060	82423	80063	82424	80064	82425	80093	82426	80062

*Supplied with bulb

ROTALLARM S X* - Flashing light with Xenon discharge tube

	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK	GY	BK
12/24V ACDC	85411	85471	85412	85472	85413	85473	85414	85474	85415	85475	85416	85476
110V AC	85421	85481	85422	85482	85423	85483	85424	85484	85425	85485	85426	85486
240V AC	85431	85491	85432	85492	85433	85493	85434	85494	85435	85495	85436	85496

*Supplied with bulb

SPARE DOMES ROTALLARM S and H1

Internally smooth	71306	71305	71308	71309	71331	71307
-------------------	-------	-------	-------	-------	-------	-------

SPARE DOMES ROTALLARM S STEADY/FLASHING and X

Internally fluted	71301	71300	71303	71304	71330	71302
-------------------	-------	-------	-------	-------	-------	-------

ACCESSORIES


	STL	GY	BK
P BASE for ROTALLARM S			83005
GRID for P BASE	90883		
WALL BASE		72692	71872




ROTALLARM HD
ROTALLARM HD H1




- > **HEAVY DUTY ALUMINIUM BASE** <
- > **3 LUMINOUS SOURCES** <
- > **EXCELLENT OPTICAL PERFORMANCE** <




ROTALLARM HD




ROTALLARM HD H1




ROTALLARM HD STEADY/FLASHING



ROTALLARM HD FLASHING H1



ROTALLARM HD X



ALSO AVAILABLE



ROTALLARM HD
STEADY/FLASHING
ROTALLARM HD
FLASHING H1
ROTALLARM HD X

ROTALLARM HD

The most successful rotating beacon in Sirena's history, engineered for industrial applications developed with heavy duty aluminium base.

Available with 3 luminous sources ROTALLARM HD offers versatility as well as a complete range of products.

KEY CHARACTERISTICS

LIGHT EFFECTS

ROTALLARM HD and **ROTALLARM HD H1**:

ROTATING LIGHT

ROTALLARM HD STEADY/FLASHING:

STEADY/FLASHING LIGHT

ROTALLARM HD FLASHING H1: FLASHING LIGHT

ROTALLARM HD X: XENON FLASHING LIGHT

VOLTAGES

ROTALLARM HD: 12V ACDC, 24V ACDC, 48V DC, 48V AC, 110V AC and 240V AC +/-10% (supplied with bulb)

ROTALLARM HD H1: 12V ACDC, 24V ACDC +/-10% (supplied with bulb)

ROTALLARM HD STEADY/FLASHING: 12/48V DC, 24/240V AC +/-10% (supplied without bulb)

ROTALLARM HD FLASHING H1: 12V ACDC, 24V ACDC +/-10% (supplied with bulb)

ROTALLARM HD X: 12/24V ACDC, 110V AC and 240V AC +/-10% (supplied with bulb)

PROTECTION GRADE

IP65

OPERATING TEMPERATURE

-30/+50 °C | **X**: -30/+40 °C

MECHANICAL FEATURES

Self-extinguishing high impact resistance PC dome

Aluminium base with M16 cable gland

Screw mounting, screws not included

Parallel axis gear drive (rotating version ROTALLARM HD and ROTALLARM HD H1)

OPTICAL FEATURES

ROTALLARM HD: anodized aluminium reflector with BA 15s 45W bulb (for 12V ACDC, 24V ACDC, 48V DC versions) or E14 25W bulb (for 48V AC, 110V AC and 240V AC versions)

ROTALLARM HD H1: anodized aluminium reflector with H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM HD STEADY/FLASHING: 40W Incandescent lamp with Ba 15d socket

ROTALLARM HD FLASHING H1: H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM HD X: Xenon discharge tube 6J, allows a high intensity single flash (1F)

CERTIFICATIONS






GRID



WALL SUPPORT

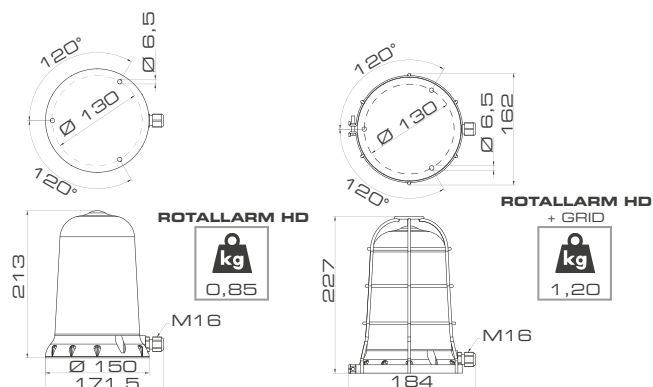**ROTALLARM HD*** - Rotating beacon with incandescent bulb

						
	BK	BK	BK	BK	BK	BK
12V ACDC	82201	82200	82203	82204	82270	82202
24V ACDC	82211	82210	82213	82214	82271	82212
48V DC	82246	82245	82290	82330	82248	82289
48V AC	82220	82280	82281	82331	82282	82332
110V AC	82226	82225	82228	82229	82247	82227
240V AC	82241	82240	82243	82244	82274	82242

*Supplied with bulb

ROTALLARM HD H1* - Rotating beacon with halogen bulb

						
	BK	BK	BK	BK	BK	BK
12V ACDC	82251	82250	82253	82254	82256	82252
24V ACDC	82261	82260	82263	82264	82273	82262

*Supplied with bulb

ROTALLARM HD STEADY/FLASHING* - Steady/flashing light with incandescent bulb

						
	BK	BK	BK	BK	BK	BK
12/48V DC	89491	89492	89493	89494	89495	89496
24/240V AC	89511	89512	89513	89514	89515	89516

*Supplied with bulb

ROTALLARM HD FLASHING H1* - Flashing light with halogen bulb

						
	BK	BK	BK	BK	BK	BK
12V ACDC	82441	82442	82443	82444	82445	82446
24V ACDC	82461	82462	82463	82464	82465	82466

*Supplied with bulb

ROTALLARM HD X* - Flashing light with Xenon discharge tube

						
	BK	BK	BK	BK	BK	BK
12/24V ACDC	84751	84752	84753	84754	84755	84756
110V AC	84761	84762	84763	84764	84765	84766
240V AC	84771	84772	84773	84774	84775	84776

*Supplied with bulb

SPARE DOMES ROTALLARM HD and H1

Internally smooth	 71306	 71305	 71308	 71309	 71331	 71307
-------------------	---	---	---	---	---	---

SPARE DOMES ROTALLARM HD STEADY/FLASHING and X

Internally fluted	 71301	 71300	 71303	 71304	 71330	 71302
-------------------	---	---	---	---	---	---

ACCESSORIES






	STL	BK
GRID for HD versions	71690	
WALL SUPPORT		71818



ROTALLARM WP
ROTALLARM WP H1



- > WATERTIGHT STAINLESS STEEL BASE <
- > HIGH IP GRADE <
- > 3 LUMINOUS SOURCES <

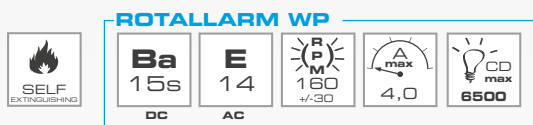

ALSO AVAILABLE



ROTALLARM WP
STEADY/FLASHING
ROTALLARM WP
FLASHING H1
ROTALLARM WP X

ROTALLARM WP

ROTALLARM WP LED is the latest addition to the most successful rotating beacon in Sirena's history, developed with watertight stainless steel base with threaded mount.

Available with 3 luminous sources ROTALLARM WP offers versatility as well as a complete range of products.

With its IP67 rating, ROTALLARM WP LED guarantees watertightness of the beacon.

KEY CHARACTERISTICS

LIGHT EFFECTS

ROTALLARM WP and ROTALLARM WP H1: ROTATING LIGHT

ROTALLARM WP STEADY/FLASHING: STEADY/FLASHING LIGHT

ROTALLARM WP FLASHING H1: FLASHING LIGHT

ROTALLARM WP X: XENON FLASHING LIGHT

VOLTAGES

ROTALLARM WP: 12V ACDC, 24V ACDC, 48V DC, 48V AC, 110V AC and 240V AC +/-10% (supplied with bulb)

ROTALLARM WP H1: 12V ACDC, 24V ACDC +/-10% (supplied with bulb)

ROTALLARM WP STEADY/FLASHING: 12/48V DC, 24/240V AC +/-10% (supplied without bulb)

ROTALLARM WP FLASHING H1: 12V ACDC, 24V ACDC +/-10% (supplied with bulb)

ROTALLARM WP X: 12/24V ACDC, 110V AC and 240V AC +/-10% (supplied with bulb)

PROTECTION GRADE

IP67

OPERATING TEMPERATURE

-30/+50 °C | X: -30/+40 °C

MECHANICAL FEATURES

Self-extinguishing high impact resistance PC dome

Stainless steel base, 3/4"G threaded mount

Parallel axis gear drive (rotating version ROTALLARM WP and ROTALLARM WP H1)

OPTICAL FEATURES

ROTALLARM WP: anodized aluminium reflector with BA 15s 45W bulb (for 12V ACDC, 24V ACDC, 48V DC versions) or E14 25W bulb (for 48V AC, 110V AC and 240V AC versions)


ROTALLARM WP H1: anodized aluminium reflector with H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM WP STEADY/FLASHING: 40W Incandescent lamp with Ba 15d socket

ROTALLARM WP FLASHING H1: H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM WP X: Xenon discharge tube 6J, allows a high intensity single flash (1F)

DRAWINGS, DIMENSIONS AND WEIGHTS



CERTIFICATIONS



ROTALLARM WP* - Rotating beacon with incandescent bulb

						
	SS	SS	SS	SS	SS	SS
12V ACDC	90009	90010	90008	90007	90027	90028
24V ACDC	90017	90016	90014	90029	90015	90030
48V DC	90031	90024	90032	90033	90034	90035
48V AC	90036	90018	90022	90037	90038	90039
110V AC	90040	90025	90026	90041	90021	90042
240V AC	90210	90203	90205	90207	90204	90043

*Supplied with bulb

ROTALLARM WP H1* - Rotating beacon with halogen bulb

						
	SS	SS	SS	SS	SS	SS
12V ACDC	90047	90048	90044	90045	90049	90216
24V ACDC	90053	90050	90052	90046	90051	90055

*Supplied with bulb

ROTALLARM WP STEADY/FLASHING* - Steady/flashing light with incandescent bulb

						
	SS	SS	SS	SS	SS	SS
12/48V DC	90241	90242	90243	90244	90245	90246
24/240V AC	90251	90252	90253	90254	90255	90256

*Supplied without bulb

ROTALLARM WP FLASHING H1* - Flashing light with halogen bulb

						
	SS	SS	SS	SS	SS	SS
12V ACDC	90540	90558	90541	90565	90566	90567
24V ACDC	90568	90569	90516	90588	90517	90589

*Supplied with bulb

ROTALLARM WP X* - Flashing light with Xenon discharge tube

						
	SS	SS	SS	SS	SS	SS
12/24V ACDC	22061	22065	22066	22067	22068	22069
110V AC	90942	91528	91532	90943	90944	90542
240V AC	91527	91517	91524	91523	91520	91519

*Supplied with bulb