

## Sonos Sounder Beacon (DC)

A general purpose electronic sounder for fire, security and industrial applications; the Sonos Sounder Beacon is certified to EN54.

With the TimeSaver base, connections are made to the base during the initial wiring phase which results in faster and more reliable installation. The sounder head 'twists and clicks' into the base on commissioning, avoiding the wiring and connection problems associated with traditional sounders. With a choice of 32 tones including all the major international standards, the Sonos Sounder Beacon has universal acceptance.


### Features

- Low current LED beacon
- Simple 'First Fix' installation
- Weatherproof to IP65 (deep base units)
- Choice of lens colours
- Sounder and beacon can be controlled separately
- Tone and volume can be preset or adjusted off-base - 20dB
- Separate connections for sounder & beacon

### Lens Colour Options



**Applications** - Fire; security; industrial alarm

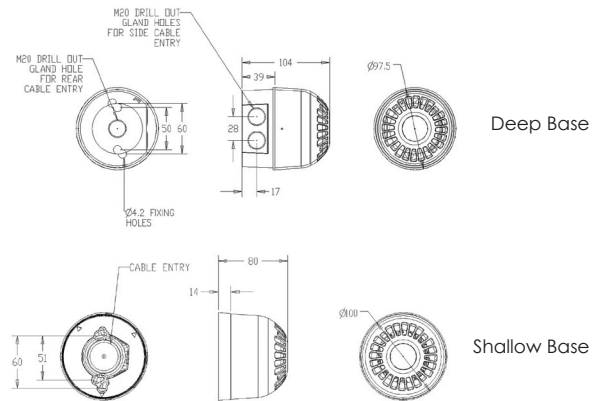

## Specifications

| Part No. | Base               | Colours    | Audibility at 1m | Tones | Voltage   | Sounder Current | Beacon Current |
|----------|--------------------|------------|------------------|-------|-----------|-----------------|----------------|
| PSC-0002 | Red shallow base   | Red lens   | Up to 106dB (A)  | 32    | 17-60V DC | 4-45mA          | 5mA            |
| PSC-0025 | Red shallow base   | Amber lens | Up to 106dB (A)  | 32    | 17-60V DC | 4-45mA          | 5mA            |
| PSC-0013 | Red deep base      | Red lens   | Up to 106dB (A)  | 32    | 17-60V DC | 4-45mA          | 5mA            |
| PSC-0027 | Red deep base      | Amber lens | Up to 106dB (A)  | 32    | 17-60V DC | 4-45mA          | 5mA            |
| PSC-0035 | White shallow base | Red lens   | Up to 106dB (A)  | 32    | 17-60V DC | 4-45mA          | 5mA            |
| PSC-0040 | White shallow base | Amber lens | Up to 106dB (A)  | 32    | 17-60V DC | 4-45mA          | 5mA            |
| PSC-0029 | White deep base    | Red lens   | Up to 106dB (A)  | 32    | 17-60V DC | 4-45mA          | 5mA            |
| PSC-0034 | White deep base    | Amber lens | Up to 106dB (A)  | 32    | 17-60V DC | 4-45mA          | 5mA            |

Other colours/combinations are available on request

**IP Rating:** IP65 (deep base) IP21 (shallow base) **Operating Temp:** -25°C to +70°C  
**Construction:** Flame Retardant Polycarbonate **Cable Entries:** Deep Base: 2 x 20mm cable glands **Weight:** 0.22kg (shallow base) 0.25kg (deep base)  
**Compliance:** EN54 3 Type A (shallow base) EN54 3 Type B (deep base)

**klaxon**  
Signalling Solutions